

MM FIBER PIGTAILED RED LASER

FRMM-638-400-10-10-00-A

Coherent's family of fiber pigtailed laser products and dual-color fiber combiners offers multi-wavelength choices covering the spectral band from blue to IR, including 405 nm, 440 nm, 515 nm, 520 nm, 532 nm, 635 nm, 660 nm, 785 nm, 808 nm, 1064 nm, and other customized wavelengths. Varied fiber options (single-mode, PM, and multimode) and customized fiber output collimators are available.



FEATURES

- High reliability
- High stability

APPLICATIONS

- Laser pointers
- Laser displays
- Test and measurement sources
- Survey equipment

MM FIBER PIGTAILED RED LASER

Product Specifications


Parameter	Min	Typical	Max	Conditions	
Optical					
Wavelength	630 nm	660 nm	645 nm	At P _O = 400 mW & 25°C	
Output Power	-	400 mW ⁽¹⁾	-	At 25°C	
Power Stability	-	-	±2.5%	ACC, 2 h @ P _O = 400 mW & 25°C	
M Squared	-	-	1.1		
Operating Temperature (case)	Recommended temperature on data sheet			Within case temperature, -10~40°C	
Electrical					
LD Working Current	-	850 mA	1000 mA	At P _O = 400 mW & 25°C	
LD Working Voltage	-	2.2 V	2.6 V	At P _O = 400 mW & 25°C	
Monitor Current	-	600 μA	1000 μA	At P _O = 400 mW & 25°C	
Fiber					
Fiber Type	105 μm/125 μm MM fiber			-	
Fiber Numerical Aperture	-	0.22	-	-	
Fiber Length	1 m	-	-	-	
Fiber Jacket (diameter)	900 μm buffer			-	
Fiber Termination ⁽²⁾	Without connector			-	
Mechanical					
Laser Head Dimensions	Length	-	28.4 mm	29 mm	-
	Diameter	-	8 mm	-	-
Reliability					
Storage Humidity	5%~85% RH			Non-condensing	
Storage Temperature	-20 to 60°C			Non-condensing	
Shock	500 g, 1 ms, 5 times/axis, 3 axes tested				
Vibration	5 g, 10-500 Hz, 4 min/cycle, 15 cycle/axis, 3 axes tested				
Expected Lifetime (MTTF)	10,000 h	-	-	At rated power & room temp.	

(1)Output power from the fiber termination; 1~400 mW is optional.


(2)FC/APC, FC/PC, or SMA905 is optional.

MM FIBER PIGTAILED RED LASER

Dimensions and Pin Configuration (Unit: mm)

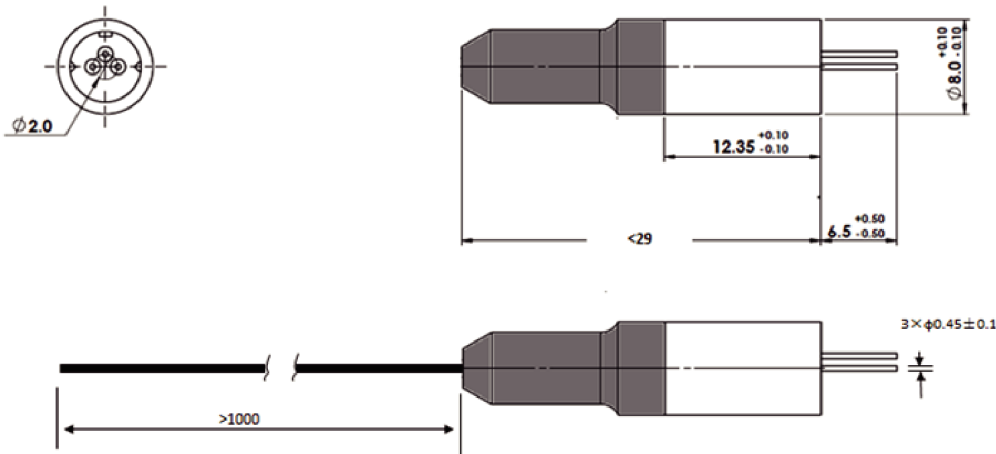

Pin Configuration

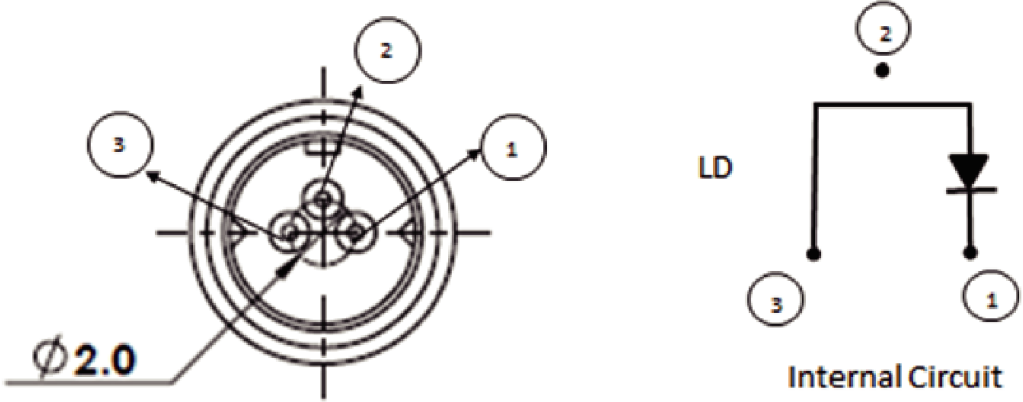

1. LD Cathode; 2. N/A; 3. LD Anode