


# 4 mW GREEN LASER DIODE MODULE

**LDM-0520-C-0004-01-99-000-A**

With advanced optics design and packaging capability, Coherent offers a variety of laser diode modules with standard collimated beam output and shaped beam output per request for OEM customers. Wavelength options include 405 nm, 445 nm, 488 nm, 520 nm, 635 nm, 655 nm, and other wavelengths upon request. These laser modules are widely adopted in generic aiming, pointing, biomedical, and machine vision applications.

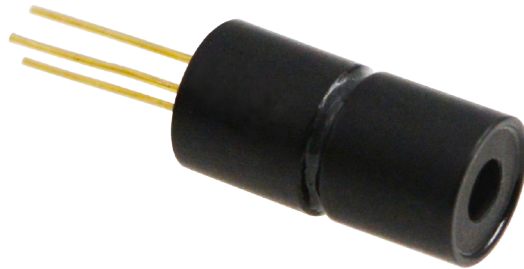

## FEATURES

- High reliability
- High performance
- Auto current control
- Wide operating temperature range

## APPLICATIONS



- Laser displays
- Surveying equipment
- Laser alignment & pointing

# 4 mW GREEN LASER DIODE MODULE

## Product Specifications

Parameter	Min	Typical	Max	Conditions
<b>Optical</b>				
Wavelength	510 nm	520 nm	530 nm	$T_{case} = 25^{\circ}C$
Output Power	-	4.0 mW	-	ACC mode, $T_{case} = 25^{\circ}C$
Beam Divergence (slow axis, $1/e^2$ )	-	0.5 mrad	1.0 mrad	4.0 mW, $T_{case} = 25^{\circ}C$
Beam Alignment Tolerance (off-axis angle, half-angle)	-	1.0 degree	1.5 degree	4.0 mW, $T_{case} = 25^{\circ}C$
Operating Temperature (case)	0°C	25°C	60°C	
Optic Material	Glass			
<b>Electrical</b>				
Operating Current	-	60 mA	100 mA	4.0 mW, $T_{case} = 25^{\circ}C$ & ACC mode
Operating Voltage	-	6.0 V	8.0 V	4.0 mW, $T_{case} = 25^{\circ}C$
<b>Mechanical</b>				
Laser Head Dimensions	Length	-	9.0 mm	-
	Diameter	-	4.5 mm	-
<b>Reliability</b>				
Storage Humidity	-	5%~85% RH	-	Non-condensing
Storage Temperature	-	-40 to +85°C	-	Non-condensing
Shock	1500 g, 0.5 ms, 2 times/axis, 6 times for 3 axes total			
Vibration	0.02 g <sup>2</sup> /Hz, 20~2000 Hz, 1 h/axis, 3 h for 3 axes total			
Expected Lifetime (MTTF)	10,000 h	-	-	4.0 mW, $T_{case} = 25^{\circ}C$

## Dimensions and Pin Configuration (Unit: mm)

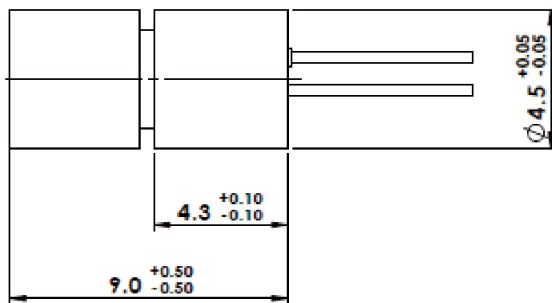

PIN1: Case , PIN2: LD Anode P, IN3: LD Cathode

## 4 mW GREEN LASER DIODE MODULE