


4 mW RED LASER DIODE MODULE

LDM-0635-C-0004-04-99-000-A

With advanced optics design and packaging capability, Coherent offers a variety of laser diode modules with standard collimated beam output and shaped beam output per request for OEM customers. Wavelength options include 405 nm, 445 nm, 488 nm, 520 nm, 635 nm, 655 nm, and other wavelengths upon request. These laser modules are widely adopted in generic aiming, pointing, biomedical, and machine vision applications.

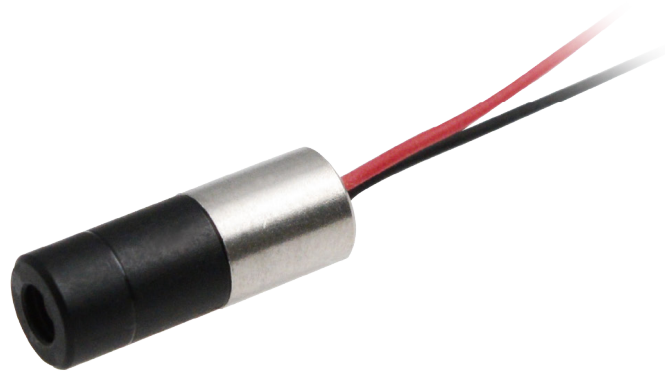

FEATURES

- High reliability
- High performance
- Wide operating temperature range
- Mini PCBA integrated for auto power control

APPLICATIONS

- Laser displays
- Surveying equipment
- Laser alignment & pointing

4 mW RED LASER DIODE MODULE

Product Specifications

Parameter		Min	Typical	Max	Conditions
Optical					
Wavelength		630 nm	637 nm	640 nm	$T_{case} = 25^{\circ}C$
Output Power		3.5 mW	4.2 mW	4.8 mW	$V_{cc} = 3.5 V, T_{case} = 25^{\circ}C$
Beam Divergence (slow axis, $1/e^2$)		-	0.5 mrad	1.0 mrad	$V_{cc} = 3.5 V, T_{case} = 25^{\circ}C$
Beam Alignment Tolerance (off-axis angle, half-angle)		-	1.0 degree	1.5 degree	$V_{cc} = 3.5 V, T_{case} = 25^{\circ}C$
Operating Temperature (case)		0°C	25°C	40°C	
Optic Material		Glass			
Electrical					
Operating Current		-	37 mA	70 mA	$V_{cc} = 3.5 V, T_{case} = 25^{\circ}C$
Operating Voltage		3.0 V	3.5 V	3.7 V	
Mechanical					
Laser Head Dimensions	Length	-	11.5 mm	-	-
	Diameter	-	4.15 mm	-	-
Reliability					
Storage Humidity		-	5%~85% RH	-	Non-condensing
Storage Temperature		-	-40 to +85°C	-	
Shock		1500 g, 0.5 ms, 2 times/axis, 6 times for 3 axes total			
Vibration		0.02 g ² /Hz, 20~2000 Hz, 1 h/axis, 3 h for 3 axes total			
Expected Lifetime (MTTF)		10,000 h	-	-	$V_{cc} = 3.5 V, T_{case} = 25^{\circ}C$

1The LDM is driven by DC voltage directly with an auto power control PCBA inside.

Dimensions and Pin Configuration (Unit: mm)

